


Drwn. _____ Chkd. _____ Appd. _____

00
Rev. No.



NO.	PART NAME	MATERIAL
1	Body	A 216 GR. WCB
2	Side Piece	A 351 GR. CF8/8M/CF3/CF3M
3	Ball	A 351 GR. CF8/8M/CF3/CF3M
4	Stem	A 276 T-304/304L/316/316L
5	Ball Seat	P.T.F.E.(VIRGIN)/GFT/CARBON FILLED
6	Body Seal	P.T.F.E.(VIRGIN)/GFT/CARBON FILLED
7	Gland Seal	P.T.F.E.(VIRGIN)/GFT/CARBON FILLED
8	Gland Bush	A 276 T-304/304L/316/316L
9	Stud & Nut	A 193 GR. B7/2H/S.S. 304/316
10	Gland Nut	C.S./194 GR. 2H/S.S. 304/316
11	Hand Lever	C.S
12	Hand Lever Nut	C.S./S.S.
13	Lever Sleeve	P.V.C.

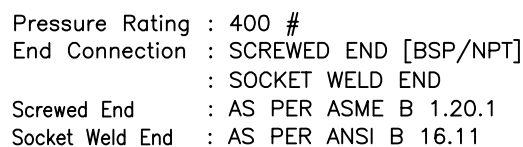

Testing Standard : BS EN 12266 I

Test Pressure in PSIG/BAR/KG./CM ²						
Test	Hydrostatic			Air		
Pr. Rating	400#					
Body	1450	100	102			
Seat	1060	73	75	80	5.5	5.6

FEATURES

- * Fire Safe Design [Optional]
- * Blowout Proof Stem
- * Antistatic Device [Optional]
- * Low Operating Torque
- * Leak Tight Stem Sealing

All Dimensions Are In mm

Client _____
 Order / Enq. No. _____
 Job / Project _____
 Manufactured By : **Nivz Valves & Automation**, Ahmedabad, Gujarat, INDIA. Do Not Copy Drawing

Due to continuous development programme, the design and data given in this leaflet are subject to change without prior notice

Do Not Copy Drawing
©COPYRIGHT

